


OS- CV

Air Sander Orbital Central Vacuum Series

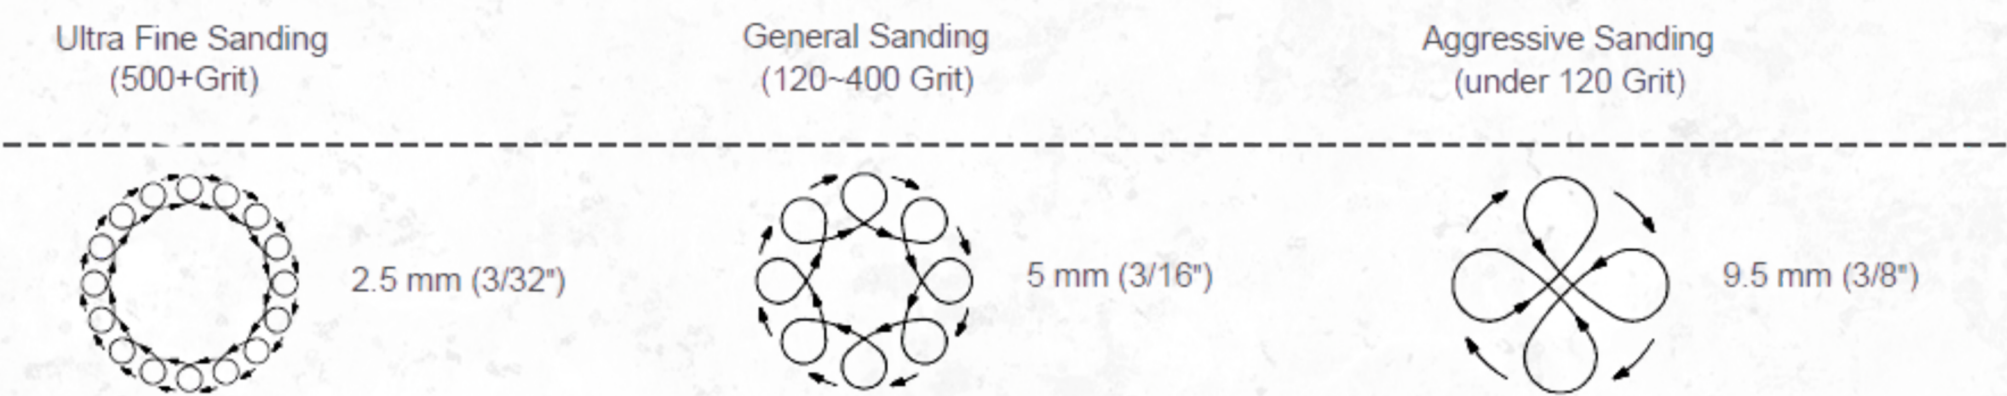

1. Supreme Ergonomic

Air inlet guard / Wrist support

2. Low-noise Design

Advanced silencing technology

3. Non-lubrication Motor (Internal)

Patented double sealed, lubrication-free air motor provides oil-free use

- **Low Vibration(Internal)**

Patented “anti-vibration” motor reduces vibration level to 0.8 (m/s²)

- Optional: Kevlar rotor blades to increase durability by at least 50%

SPECIFICATIONS

Model Number	Avg. Air Cons.	Tool Weight	Length	Width	Height	Free Speed	Sound pressure	Vibrations	Air Inlet	Pad Dia	Orbit
OS-6-188CV	85 L/min (3 CFM)	0.9 kgs (2.0 lbs)	210 mm (8.27")	150 mm (6")	110 mm (4.33")	12,000 RPM	82 dBA	1.8 (m/s ²)	1/4"	150 mm (6")	5 mm (3/16")
OS-6-094CV	85 L/min (3 CFM)	0.9 kgs (2.0 lbs)	210 mm (8.27")	150 mm (6")	110 mm (4.33")	12,000 RPM	82 dBA	1.8 (m/s ²)	1/4"	150 mm (6")	2.55 mm (3/32")
OS-5-188CV	85 L/min (3 CFM)	0.9 kgs (2.0 lbs)	200 mm (7.87")	150 mm (6")	110 mm (4.33")	12,000 RPM	82 dBA	1.8 (m/s ²)	1/4"	125 mm (5")	5 mm (3/16")
OS-5-094CV	85 L/min (3 CFM)	0.9 kgs (2.0 lbs)	210 mm (8.27")	150 mm (6")	110 mm (4.33")	12,000 RPM	82 dBA	1.8 (m/s ²)	1/4"	125 mm (6")	2.55 mm (3/32")

